



**SOLID**  
TO SUCCEED

SCISSOR LIFT

# XG0608C



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

# XG0608C

## Scissor lift


### FEATURES

#### PRODUCTIVITY

25% theoretical gradeability  
 Battery charge indicator and diagnostic display  
 Manual platform lowering valve  
 Both platform and ground control panel with emergency stop button  
 Auto brake system  
 Solid non-marking tires  
 Tilt alarm  
 Hourmeter record  
 Lift and lower alarm  
 Horn  
 Flashing beacons  
 Drive alarm  
 Overload alarm

### OPTIONS

Platform working light  
 Air-line to platform  
 AC power to the platform

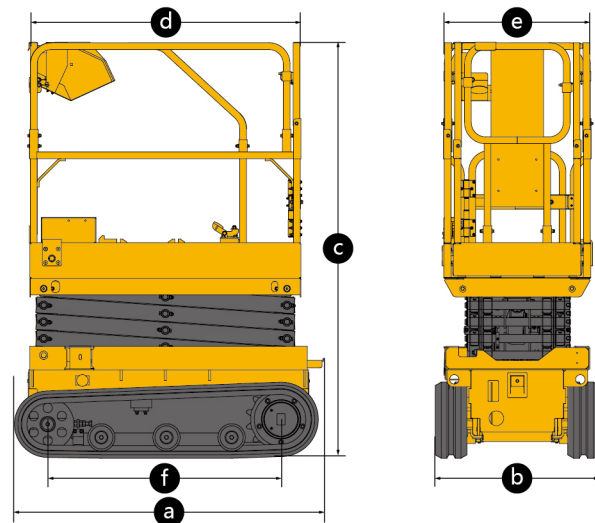

Item	Unit	XG0608C
Lift capacity	kg	200
Lift capacity of auxiliary platform	kg	115
Occupant capacity	-	1
Working height	m	6.5
Platform height	m	4.5
Length of auxiliary platform	mm	550
Ground clearance	mm	70
Turning radius	m	0
Drive motor	kW	0.7
Lift motor	kW	1.3
Drive speed (retracted/extended)	km/h	2/0
Lift/Lower time	s	20-30/19-32
Gradeability	%	25
Tilt alarm	°	1.7
Batteries	V/Ah	24/115
Charger	V/A	24/15
Tires	-	T150×72×44
Weight	kg	800
a Length (without ladder)	mm	1480(1450)
b Width	mm	790
c Height (platform folded)	mm	1990(1625)
d x e Platform size (Length x Width)	mm	1290×700
f Wheelbase	mm	1110

SOLID TO SUCCEED