



SOLID
TO SUCCEED

ROUGH TERRAIN SCISSOR LIFTS

XG1218ERT/XG1418ERT



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XG1218ERT/XG1418ERT

Rough terrain scissor lifts

FEATURES

PRODUCTIVITY


- 2 driving wheels
- 2 steering wheels
- 35% theoretical gradeability
- Outrigger leveling system
- Both platform and ground control panel with emergency stop button
- High altitude automatic limit travel protection
- Foam-filled rough terrain tires
- Axle balance system
- Lift and lower alarm
- Hourmeter record
- Drive alarm
- Tilt alarm
- Horn

POWER

12V DC emergency power

OPTIONS

High altitude low speed walking device

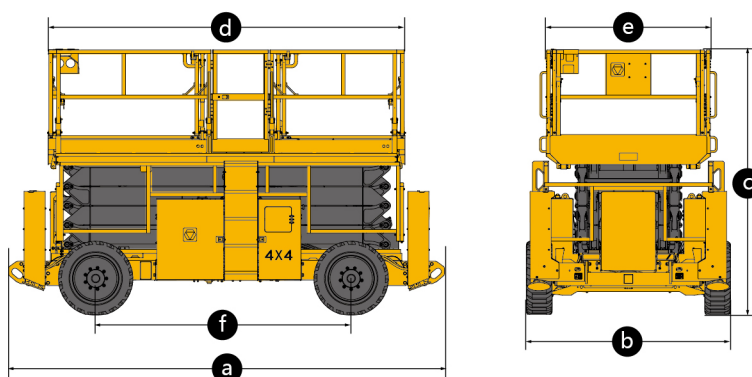

Item	Unit	XG1218ERT	XG1418ERT
Lift capacity	kg	455	365
Lift capacity of auxiliary platform	kg	135	135
Occupant Capacity (indoor/outdoor)	-	4/2	3/2
Working height	m	12	14.3
Platform height	m	10	12.3
Length of auxiliary platform	mm	1430	1430
Length of platform(main & sub platform)	mm	4310	4310
Ground clearance	mm	200	200
Turning radius(inside/outside)	m	4.8	4.8
Drive Speed (retracted/extended)	km/h	6/0.4	6/0.1
Lift/Lower time	s	45/46	60/50
Gradeability	%	35	35
Tilt alarm(side/forward and backward)	°	2/3	2/3
Batteries	V/AH	Lead-acid	Lead-acid
Charger	V/A	48V/35A	48V/35A
Drive motor	kW	3.3	3.3
Lift motor	kW	7.4	7.4
Tires	-	26×12	26×12
Hydraulic tank	L	70	70
Weight	kg	4400	5200
a Length	mm	3835	3835
b Width	mm	1760	1760
c Height(platform folded)	mm	2580(1830)	2730(1980)
d × e Platform size (Length × Width)	mm	2880×1520	2880×1520
f Wheelbase	mm	2290	2290

SOLID TO SUCCEED