



SOLID
TO SUCCEED

ROUGH TERRAIN SCISSOR LIFTS

XG2225ERT



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XG2225ERT

Rough terrain scissor lifts

FEATURES

PRODUCTIVITY


4 driving wheels
 4 steering wheels
 30% theoretical gradeability
 Outrigger leveling system
 Both platform and ground control panel with emergency stop button
 High altitude automatic limit travel protection
 Foam-filled rough terrain tires
 Lift and lower alarm
 Drive alarm
 Tilt alarm
 Horn

POWER

12V DC emergency power

OPTIONS

Platform working light

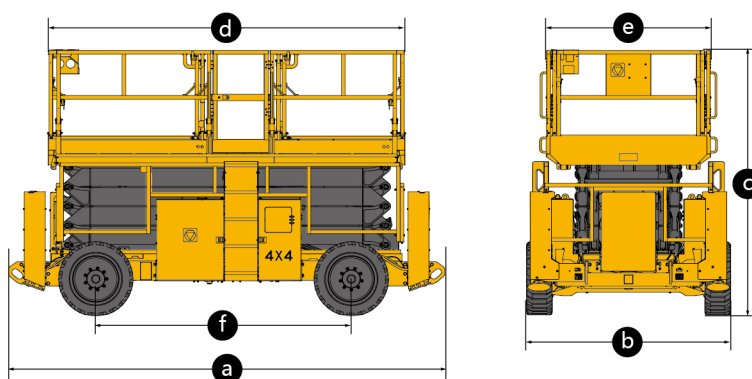

Item	Unit	XG2225ERT
Lift capacity	kg	750
Lift capacity of auxiliary platform	kg	750
Occupant Capacity (indoor/outdoor)	-	4/4
Working height	m	22
Platform height	m	20
Length of auxiliary platform	mm	2700
Length of platform(main & sub platform)	mm	7290
Ground clearance	mm	400
Turning radius(inside/outside)	m	1.5/3.5
Drive Speed (retracted/extended)	km/h	5/0.4
Lift/Lower time	s	80/60
Gradeability	%	30
Tilt alarm(side/forward and backward)	°	2/3
Batteries	V/AH	48/630
Charger	V/A	48/60
Drive motor	kW	3.3
Lift motor	kW	10
Tires	-	36×14-20
Hydraulic tank	L	150
Weight	kg	13400
a Length	mm	4950
b Width	mm	2460
c Height(platform folded)	mm	3860/3000
d × e Platform size (Length × Width)	mm	4590×2250
f Wheelbase	mm	3300

SOLID TO SUCCEED